

Automatic Washbasin Tap with Piezo Button SLU 44P




SLU 44P

Characteristics:



- **vandal-proof**
- **designed for prisons**
- **economical aerator, rate of flow 6 l/min**
- stainless steel cover, thickness 3 mm
- water flows after soft push of the piezo push button
- adjustable flushing time from 2 to 62 sec., standardly adjusted on 10 sec.
- water could be sopped by follow-up soft push of piezo button
- destined for cold or premixed water
- parameters adjustment by SLD 04 remote control
- function switch ON/OFF
- water temperature is regulated by ball valve

Installation Drawing:

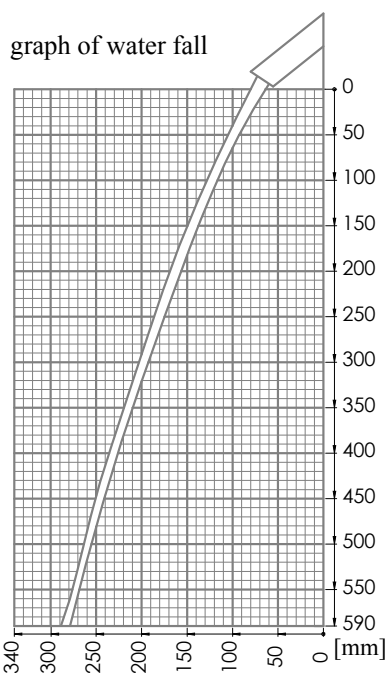

Technical Specification:

Stainless steel cover dimension	160 x 160 x 3 mm
Mounting box dimension	145 x 155 x 100 mm
Operating voltage:	
- SLU 44P	24V DC
- SLU 44PB	6V
Power input	
- SLU 44P	5 W
- SLU 44PB	1,4 W
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	6 l/min. (inf. data)
Water inlet	male thread G 1/2"

Supply Specification:

- SLU 44P** – **supply No. 43449** special vandal-proof stainless steel cover (3 mm) with an integrated electronics with piezo button; stainless steel mounting box with a brass screw-coupling, electromagnetic valve (1 pc.) and ball stop valve; special spout „Anti-suicidal“; 4 pcs. TORX screws; 4 pcs. AA alkaline battery 1,5 V, 2700 mAh (only for model with „B“ index)
- SLU 44PB** – **supply No. 64441**

Doporučené příslušenství:

- SLZ 01Y** – **supply No. 05012** external power supply 230/24V DC for operating of max. 2 pcs. of washbasin taps
- SLZ 01Z** – **supply No. 05011** external power supply 230/24V DC for operating of max. 4 pcs. of washbasin taps
- SLZ 03** – **supply No. 05030** switched power supply 230/24V DC for operating of max. 9 pcs. of washbasin taps
- SLZ 04Y** – **supply No. 05041** external power supply 230/24V DC on DIN rail for operating of max. 5 pcs. of washbasin taps
- SLZ 04Z** – **supply No. 05042** external power supply 230/24V DC on DIN rail for operating of max. 9 pcs. of washbasin taps
- SLZ 04X** – **supply No. 10049** external power supply 230/24V DC on DIN rail for operating of max. 15 pcs. of washbasin taps
- SLZ 06** – **supply No. 05060** external power supply 230/24V DC for operating of max. 1 pc. of washbasin tap
- SLD 04** – **supply No. 07040** remote control for an adjustment of parameters of radar flushing unit and piezo electronics
- SLT 04** – **supply No. 09040** thermostatic valve 3/4", rate of flow 28 l/min by the pressure 0,1 MPa
- SLT 05** – **supply No. 09050** thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa
- SLT 07** – **supply No. 09070** thermostatic valve 3/4", rate of flow 43 l/min by the pressure 0,1 MPa
- SLT 08** – **supply No. 09080** thermostatic valve 1", rate of flow 53 l/min by the pressure 0,1 MPa
- SLT 09** – **supply No. 09090** thermostatic valve 5/4", rate of flow 82 l/min by the pressure 0,1 MPa
- SLT 10** – **supply No. 09100** thermostatic valve 6/4", rate of flow 155 l/min by the pressure 0,1 MPa
- SLA 36** – **supply No. 06360** set of alkaline batteries, 4 pcs. of 1,5V AA, 2700 mAh (only for models with "B" index)